



The WMBE mowing bucket is useful for mowing grass, reed beds or similar environments, along rivers and canals or streams in general.

This equipment is particularly suitable for reclamation consortia, which need to conduct constant cleaning and rehabilitation of grass, shrubs and reeds, which grow along the banks of ditches and canals. This operation is useful to ensure the correct flow of irrigation water.

The front cutting system and the large mesh grid make it ideal for starting mowing in water immersion, collecting the cut grass and reeds at the same time inside the bucket.

Its operation is characterized by the **central transmission with gears in oil bath,** driven by a reliable and efficient orbital motor, completely protected by the frame.







- Available in five models for excavators from 3 to 30 tons
- Reinforced blade teeth
- Play recovery system on the cutter bar
- Extremely robust, built with high resistance and wear resistant steels
- Low operating hydraulic power

## **Optional:**

- Volume increase grid kit
- Sliding flange for space recovery and arm offset on wheeled excavator
- Up-and-over kit with leaf spring



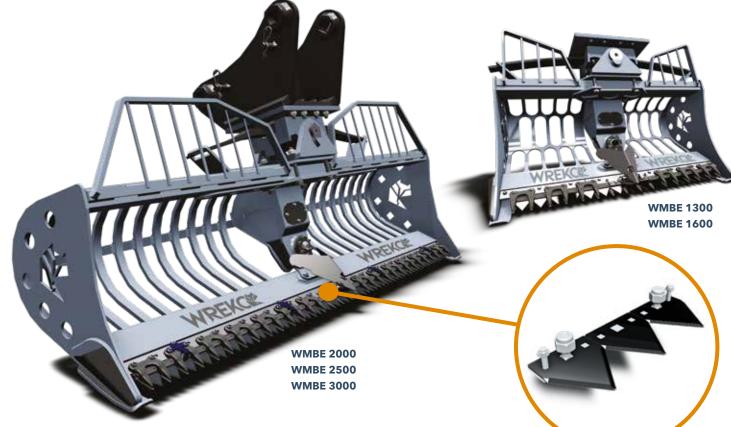

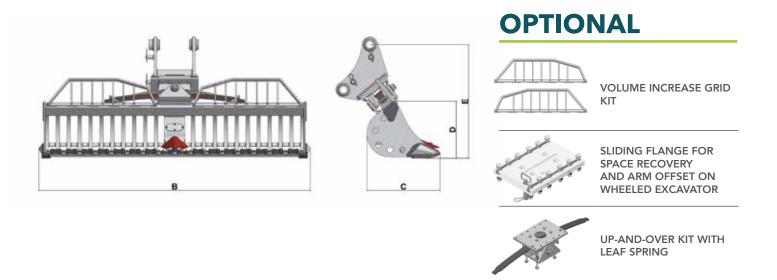



| MODELLO                   |       | WMBE1300  | WMBE1600  | WMBE2000  | WMBE2500  | WMBE3000  |
|---------------------------|-------|-----------|-----------|-----------|-----------|-----------|
| Excavator                 | ton   | 3 - 5     | 5 - 12    | 12 - 25   | 12 - 30   | 12 - 30   |
| Basic equipment<br>weight | kg    | 190       | 200       | 270       | 345       | 400       |
| В                         | mm    | 1300*     | 1600*     | 2000      | 2500      | 3000      |
| C                         | mm    | 700       | 700       | 700       | 700       | 700       |
| D                         | mm    | 550       | 650       | 650       | 650       | 650       |
| Oil flow                  | l/min | 40 - 60   | 40 - 60   | 40 - 60   | 40 - 60   | 40 - 60   |
| Work pressure             | bar   | 120 - 140 | 120 - 140 | 120 - 140 | 120 - 140 | 120 - 140 |

## **OPTIONAL**

| Volume increase grid kit            |                                       |    |    |    |    |    |  |  |  |  |
|-------------------------------------|---------------------------------------|----|----|----|----|----|--|--|--|--|
| Weight                              | kg                                    | 10 | 15 | 17 | 20 | 25 |  |  |  |  |
|                                     | for space recover<br>vheeled excavato |    |    |    |    |    |  |  |  |  |
| Weight                              | kg                                    | 50 | 50 | 50 | 50 | 50 |  |  |  |  |
| Up-and-over kit<br>with leaf spring |                                       |    |    |    |    |    |  |  |  |  |
| Weight                              | kg                                    | 90 | 90 | 90 | 90 | 90 |  |  |  |  |

\* The bottom is made from calendered sheet metal



**#FollowTheFox** 









www.wreko.com